

StreetWorks 866 859 0513

4 Bud Way, Suite 3, Nashua, NH

DRIVE IT !



Thank you for buying a StreetWorks product. Be confident that it will provide the quality and performance that you demand for your car. *Please read and understand all installation instructions before beginning.* Planning and preparation will make the actual installation process easy and quick.


DISCONNECT ELECTRICAL POWER AT THE BATTERY BEFORE DOING ANY WIRING !

REMINDER BUZZER WITH INDICATOR LIGHT #32032

For Turn Signals, Door Safety Pins or lights

- ☐ Buzzer connects to the front turn signal outputs as a reminder that the turn signals are on.
- ☐ Or can be used for other circuits such as door safety pins to identify that they have been left unlocked, etc.
- ☐ Inputs are diode protected to prevent back feed.

For Turn Signal Reminder - Connect one of the gray lead wires to the right front turn signal feed wire and the other gray wire to the left front turn signal feed wire. It doesn't matter which gray wire is connected to which feed. Attach the black buzzer wire to ground. The buzzer will sound each time the turn signals flash.

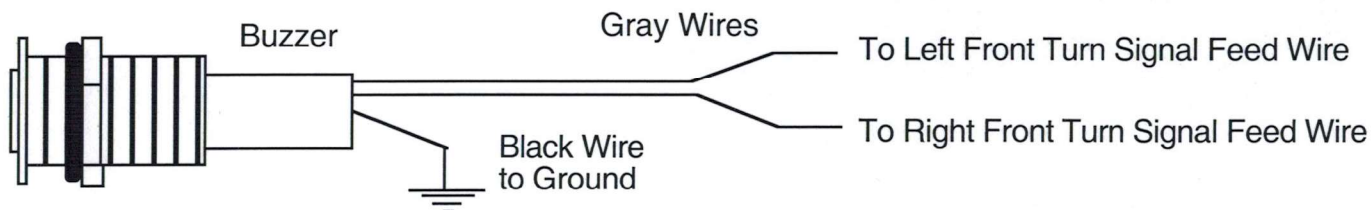

For Door Safety Pins - Connect one of the buzzer gray lead wires to the "normally open" side of the right door pin micro-switch and the other gray wire to the "normally open" side of the left door pin micro-switch. It doesn't matter which gray wire is connected to which side. Attach the black buzzer wire to ground. Both door pin micro-switches should be fed +12vdc off an ignition controlled circuit. The buzzer will sound each time the ignition is turned on and either or both doors are not locked.

