


- 1. Determine the Location** for the charger in your console. Make sure you have proper depth behind it.
- 2. Cut the panel** using the template/ dimensions **carefully** mark and cut holes.
- 3. Mounting** once the hole is cut insert the charger panel. Then use the L shaped brackets to grab the back of the upholstery and tighten the nuts so the L bracket just start to bend.
- 4. Do the Wiring.** Always ground to a good chassis ground. The charger frame will be attached to the panel, so leave ample wire to allow panel removal.
- 5. Reconnect the main power and test your wiring.**

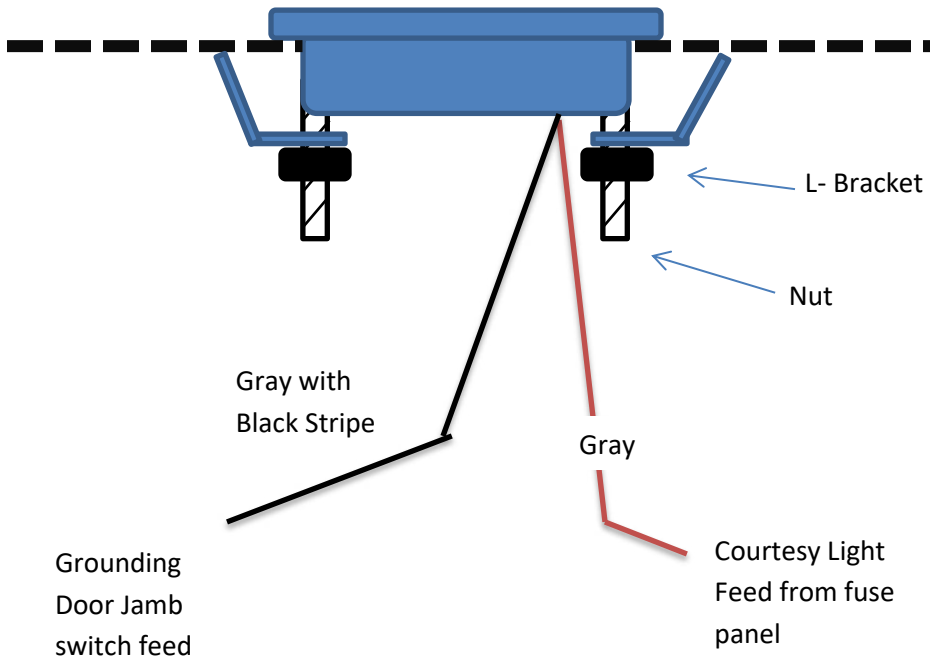

**Brushed SS Series
Courtesy Light**

**#IL-54SB
\$39.00**

Both ports have a 5 volt / 2.4Amp max output.

**DISCONNECT MAIN POWER AT THE BATTERY
BEFORE DOING ANY WIRING!**

Panel Cutout Template

